

# HIGH PERFORMANCE DEEP CYCLE BLOC FLOODED



The Banner High Performance bloc battery offers higher charge acceptance and a longer service life than conventional lead-acid batteries. With innovative CNT carbon technology and a robust design, it delivers exceptional energy efficiency and high cycle stability. This battery impresses with its durability and improved energy supply efficiency, especially at higher discharge rates.



Fast-charging capability



Opportunity charging



Deep-discharge resistance



Extended service life



High-temperature performance



Recyclable

## Applications

- Golf carts
- Electric work platforms
- Cleaning machines
- Electric vehicles
- Caravans / motorhomes
- And much more



## Advantages at a glance

- High energy efficiency
- Low internal resistance thanks to carbon additives
- Long service life with high cycle stability due to carbon technology
- Suitable for extreme temperatures
- Allows opportunity charging to achieve additional operating time if needed
- Reinforced grid plates
- Improved recovery after deep discharges
- Low-maintenance and reliable
- Up to 99% recyclable product



# HIGH PERFORMANCE DEEP CYCLE BLOC FLOODED




## Technical Data


| Type         | Article number | V  | Capacity / Ah |       | Dimensions in mm<br>L x B x H | Filled weight in kg<br>(+/-2%) | Terminals | Layout | Case |
|--------------|----------------|----|---------------|-------|-------------------------------|--------------------------------|-----------|--------|------|
|              |                |    | 5 hr          | 20 hr |                               |                                |           |        |      |
| HP 6V 105    | 04052HP105     | 6  | 185           | 225   | 260 x 180 x 247/277           | 28                             | UTL       | 0      | PP   |
| HP 6V 125    | 04052HP125     | 6  | 195           | 240   | 260 x 180 x 247/277           | 30                             | UTL       | 0      | PP   |
| HP 6V 305    | 04052HP305     | 6  | 270           | 315   | 308 x 174 x 339/365           | 40,5                           | DUAL      | 0      | PP   |
| HP 6V 305 HC | 04052HP305HC   | 6  | 295           | 350   | 308 x 174 x 339/365           | 44                             | DUAL      | 0      | PP   |
| HP 6V L16    | 04052HP16      | 6  | 320           | 390   | 308 x 174 x 388/416           | 48                             | DUAL      | 0      | PP   |
| HP 6V L16 HC | 04052HP16HC    | 6  | 345           | 420   | 308 x 174 x 388/416           | 50                             | DUAL      | 0      | PP   |
| HP 8V 875    | 04052HP875     | 6  | 145           | 170   | 260 x 180 x 247/277           | 29                             | UTL       | 0      | PP   |
| HP 12V 1275  | 04052HP1275    | 12 | 120           | 150   | 333 x 183 x 248/280           | 39                             | UTL       | 1      | PP   |

Die angegebenen elektrischen Werte gelten für Belastungen im vollgeladenen Zustand und einer Umgebungstemperatur von 20°C


Dual

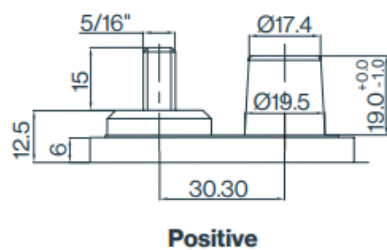

Negative



UTL

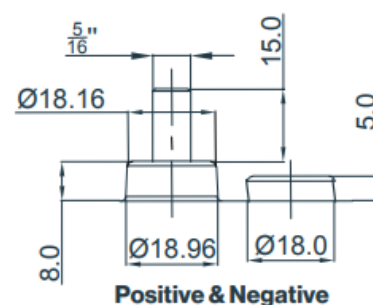

**A: Banner GmbH, A-4021 Linz**, Banner Straße 1,  
Tel. 0732/3888-0, Fax 0732/3888-21399, e-mail: office@bannerbatterien.com  
**CH: Banner Batterien Schweiz AG, CH-5746 Walterswil**, Banner Straße 1,  
Tel. 0840 Banner (226637), 0800 Banner (226637),  
e-mail: office.bchw@bannerbatterien.com, e-mail Verkauf: order.bchw@bannerbatterien.com  
**D: Banner Batterien Deutschland GmbH, D-85931 Allershausen (München) - Deutschland**, Kesselbodenstraße 3,  
Telefon: +49/(0)6441/30 73-23000, Fax: +49/(0)6441/30 73-23099, e-mail: office.bda@bannerbatterien.com